


# SC8

# SERIES

PAGE 32  
SLIP COUPLING  
(SPLIT HUB TYPE)

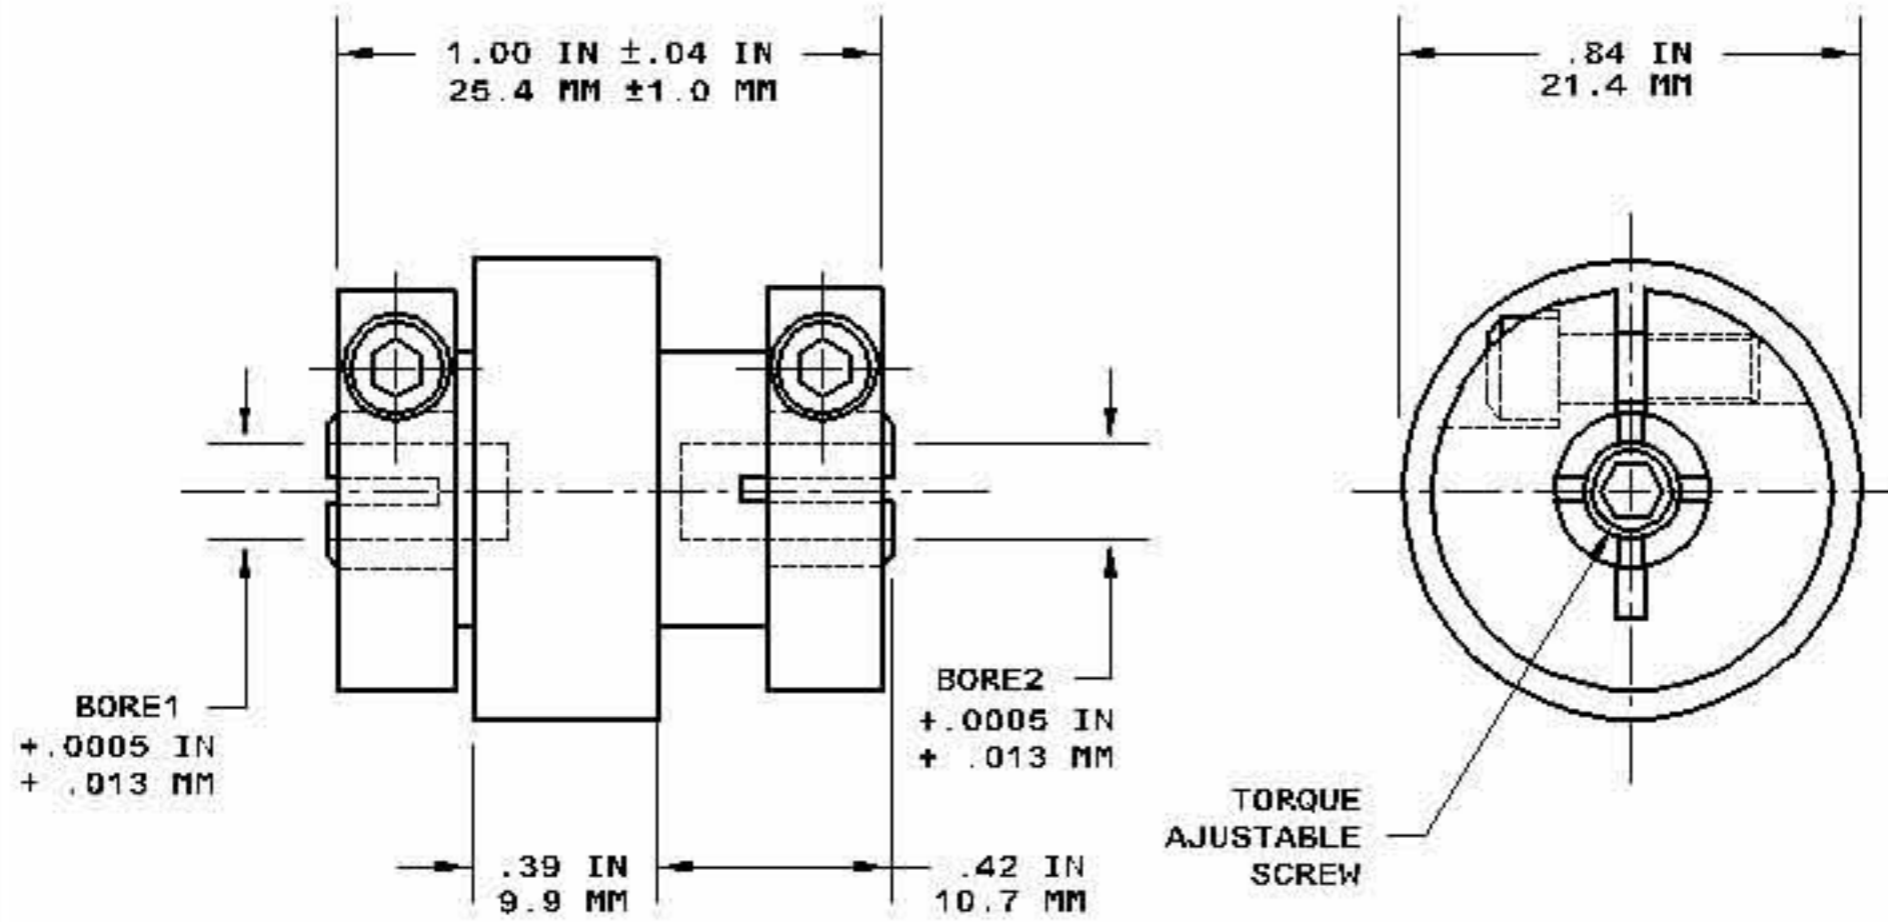

- STAINLESS STEEL HOUSING
- ADJUSTABLE TORQUE SCREW
- BI-DIRECTIONAL
- RULON CLUTCH FACES
- SLIP SPEEDS UP TO 1200 RPM

TOLERANCES			
INCH		METRIC	
.XX	± .016	.X	± .4
.XXX	± .005	.XX	± .13

CATALOG NO.	BORE1		BORE2	
	IN	MM	IN	MM
SC8-27A0.125	.1250	3.175	.1250	3.175
SC8-27A0.157	.1575	4.000	.1575	4.000
SC8-27A0.187	.1875	4.762	.1875	4.762
SC8-27A0.196	.1969	5.000	.1969	5.000
SC8-27A0.236	.2362	6.000	.2362	6.000
SC8-27A0.250	.2500	6.350	.2500	6.350
SC8-27A0.125-187	.1250	3.170	.1875	4.762
SC8-27A0.125-250	.1250	3.170	.2500	6.345
SC8-27A0.157-196	.1575	4.000	.1969	5.000
SC8-27A0.157-236	.1575	4.000	.2362	6.000
SC8-27A0.187-250	.1875	4.762	.2500	6.345
SC8-27A0.196-236	.1969	5.000	.2362	6.000

## IMPULSE

## MECHANISMS INC

78-82 N INDUSTRY CT  
DEER PARK NY 11729  
TEL (631) 586-5755  
FAX (631) 586-5757