


# SH11

# SERIES

PAGE 45  
DYNAMICALLY  
BALANCED SHAFT  
HUB CLAMPS

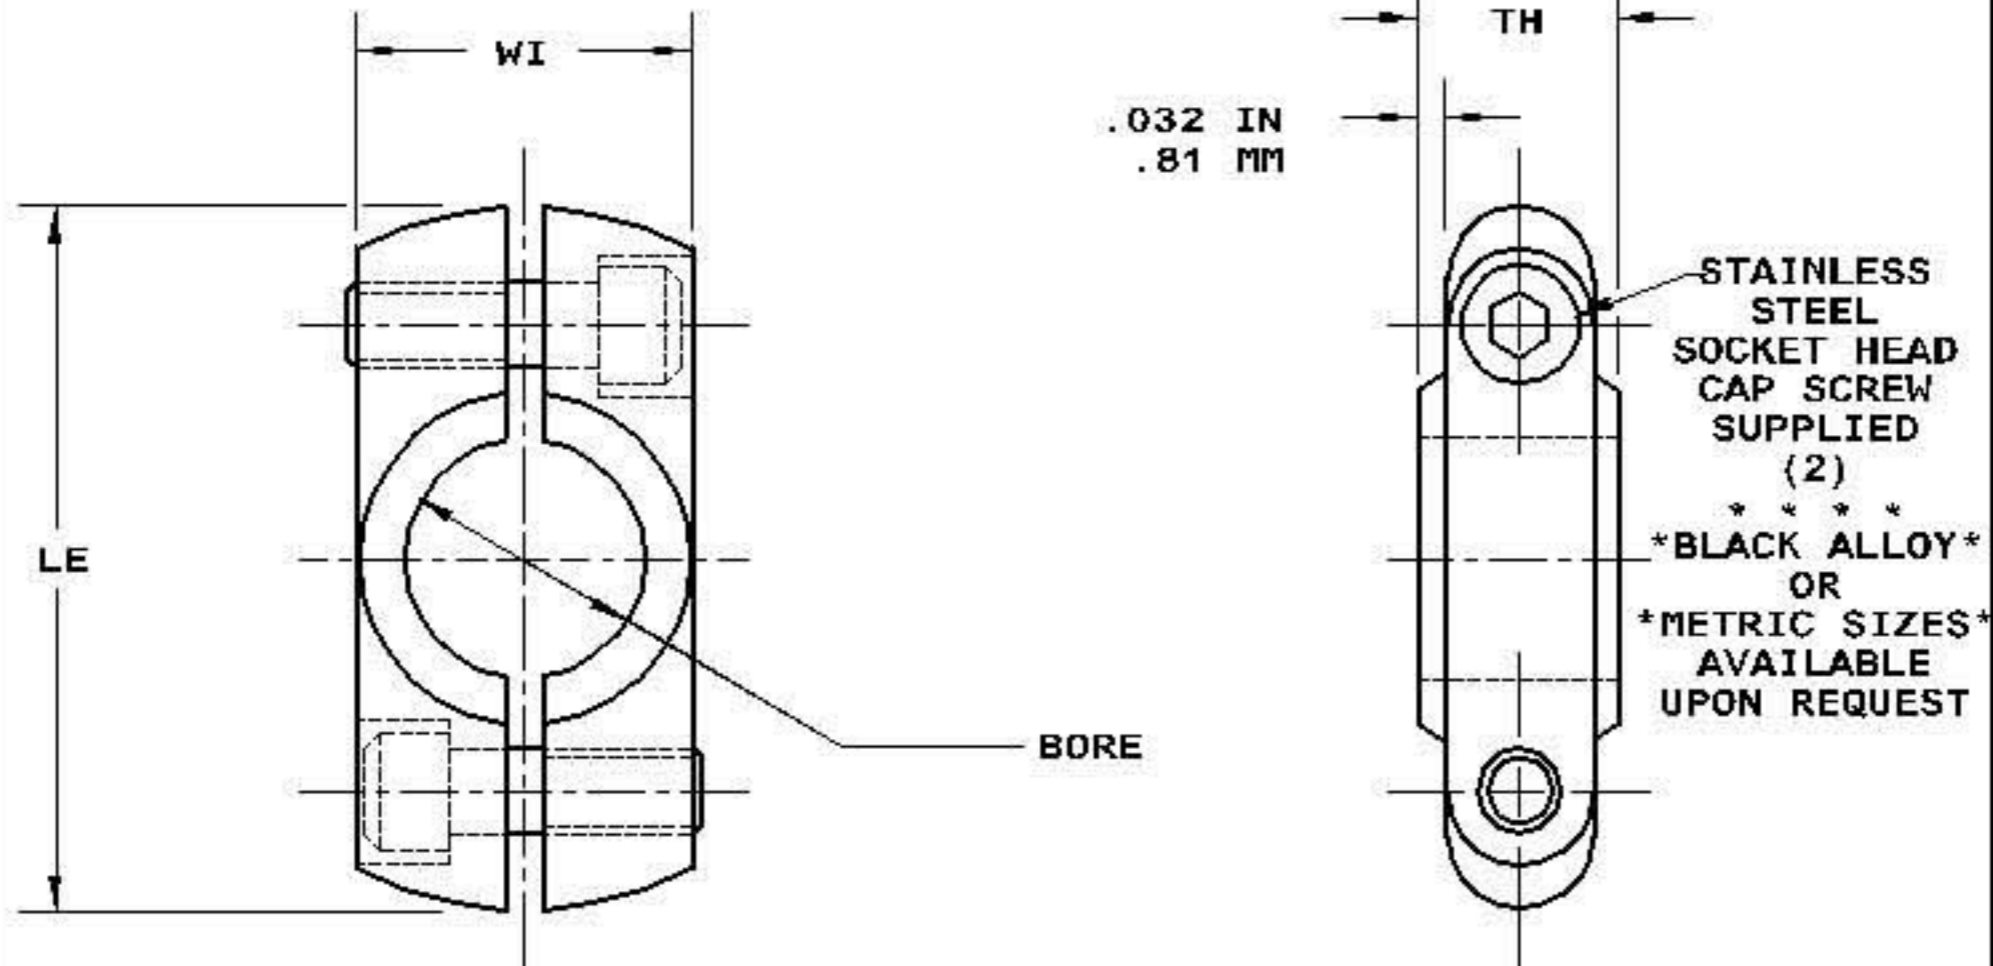

TOLERANCES			
INCH		METRIC	
.XX	±.016	.X	±.4
BORE	+.001	BORE	+.026

SUFFIX	MATERIAL	FINISH	BALANCE TYPE
H	STAINLESS STEEL 416	RC 38-45 PASSIVATE	AS MACHINED
Y	STAINLESS STEEL 416	RC 38-45 PASSIVATE	DYNAMICALLY BALANCED

CATALOG NO.	BORE		LE		WI		TH		SCREW	
	IN	MM	IN	MM	IN	MM	IN	MM	IN & MM*	
SH11-2324.181	H Y	.181	4.60							
SH11-2324.188	H Y	.188	4.78	.72	18.3	.31	7.9	.240	6.10	2-56
SH11-2324.197	H Y	.197	5.00							
SH11-2424.250	H Y	.250	6.35	.75	19.0	.37	9.4	.240	6.10	2-56
SH11-2424.260	H Y	.260	6.60							
SH11-2824.312	H Y	.312	7.92							
SH11-2824.315	H Y	.315	8.00	.87	22.1	.43	11.0	.240	6.10	2-56
SH11-2824.339	H Y	.339	8.60							

## IMPULSE

## MECHANISMS INC

78-82 N INDUSTRY CT  
DEER PARK NY 11729  
TEL (631) 586-5755  
FAX (631) 586-5757